

Dr. D. Ram DAV Public School, Gola Road, Danapur, Patna.

Ref No!- D Ramdar/2026/176

Tender Notice

Dated:- 12/09/2026

Sealed quotations are invited from reputed and experienced firm as per following Details.

Sl. No.	Particulars	
01	Name of Work and Estimate Area	01. Tiles Work Estimated Area 3975 Sq. Ft. 02. Renovation of Student washroom Estimated Area 800 Sq. Ft.
02	Date of tender Notification	12.09.2026
03	Last date/Time for receipt of Bids	19.09.2026
04	Time of Completion	30 Days.
05	Name and address of office inviting Tender	Dr. D. Ram DAV Public School, Gola Road Patna
06	Contact No. of procurement office	9263182164

FOLLOWING POINTS NEED ATTENTION


01. Only the quality materials (Branded Company) and standard workmanship will be accepted.
02. Each interested firm will submit the two sealed quotations viz financial bid and technical bid. Please submit duly filled up mandatory proforma by tendered.
03. The school authority will not be liable to pay any tax, freight etc. which has not been expressly stipulated in the will deduct TDS as per rule of Income Tax.
04. The undersigned does not bind himself/herself to accept the lowest quotation and reserve the right to accept the quotation in whole or in part i.e. with respect to all the articles mentioned in the attached statement or in respect of one or more than one articles specified on the attached statement as he/she may decide.
05. On acceptance of the quotation it will become a contract and the contractor shall be bounded by the terms and conditions of the quotation as well as contractor must fulfill the terms and conditions of Government of India/State Govt.
06. The quality of articles indicated in the attached statement may be increased or decreased at the discretion of the undersigned without assigning any reason.
07. The rate quoted by the contractor shall hold good up to finishing of the construction. No amendment will be expected in the approved rate.
08. Rates quoted should be inclusive of all taxes, no extra charges will be paid.
09. The Contractor must produce a Material Warranty Certificate before finalize the bills.
10. The payment will be made to the contractor after deduction of Retention Money through A/c payee cheque as per agreement and duly approved by the Architect.
11. Quotations which do not comply with above conditions are liable to be rejected.
12. The site proposed map, estimate and terms & conditions are open for inspection before bidding for all interested persons.
13. All due formalities related to safety and security of the laborers' (as per Govt. Norms) is sole responsibility of the firm who will accept the work.
14. For payment of Building Cess: Under the provisions of Construction Workers' Welfare Cess Act, the contractor is responsible to pay Building & Other Construction Workers' Welfare Cess, in relation to a building or other construction work to State Govt.
15. All disputes subject to Patna Jurisdiction only.


(Dr. Bharati Nayak)


Principal
Principal

r. D. Ram D.A.V. Public Schr
Gola Road, Danapur, Patna

Serial	SoR	Particulars	Quantity	Rate	Unit	Amount
		TOILET SIZE (20'X20')	400.0		SQFT	
	A	DEMOLITION AND DISMANTLING				
1	15.23.2	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead For thickness of tiles above 25 mm and upto 40 mm	137.2		sqm	
2	MR	Taking out 4 W.C. pan and 10 urinal basins urinal basins	7.0		each	
3	MR	Taking out pipelines for about 18 taps	6.0		each	
	B	TOILET				
4	4.1.3	Providing PCC (1:2:4) with graded Stone chips of 20 mm nominal size excluding the cost of centring and shuttering all works in Foundation all complete (3" PCC)	1.8		Cu m	
5	6.1.12/1	Fly ash Brick work with cement mortar (1:4) in Foundation & Plinth	4.1		Cu m	
6	13.11.1	Cement plaster in course sand 12 mm cement plaster of mix: 1:3 (1 cement 3 coarse sand)	92.5		SQM	
	C	TILE AREA				
7	11.41.2	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption's less than 0.08 % and conforming to IS : 15622 of approved make in all colours and shades, laid on 20 mm thick cement mortar 1:4 (1 cement: 4 coarse sand) including grouting the joint with white cement and matching pigments etc., complete.	29.6		Sq m	
8	11.38	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS : 15622 (Thickness to be specified by the manufacture) of approved make in all colours, shades except burgundy , bottle green , black of any size as approved by Engineer-in-charge in skirting , risers of steps and dados over 12 mm thick bed of cement Mortar 1:3(1 cement: 3 coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm including pointing in white cement mixed with pigment of matching shade complete. (7" HIGH)	83.5		Sq m	
			TOTAL			

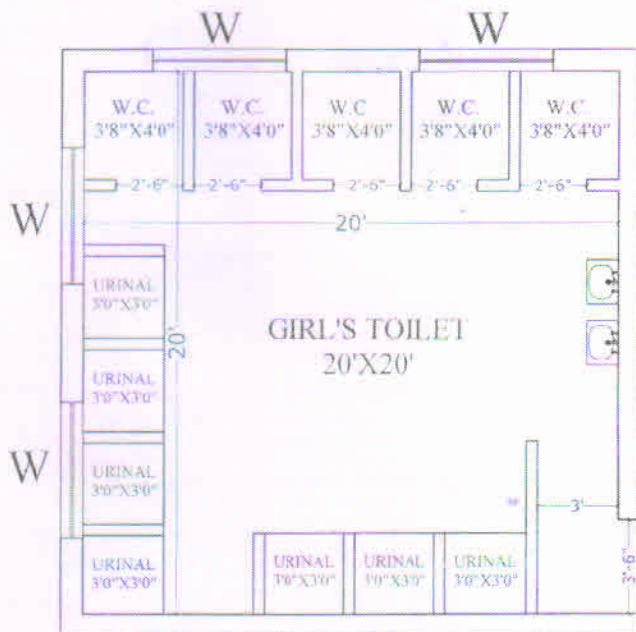


EXISTING GIRL'S TOILET
ON FIRST FLOOR (BLOCK 'A')

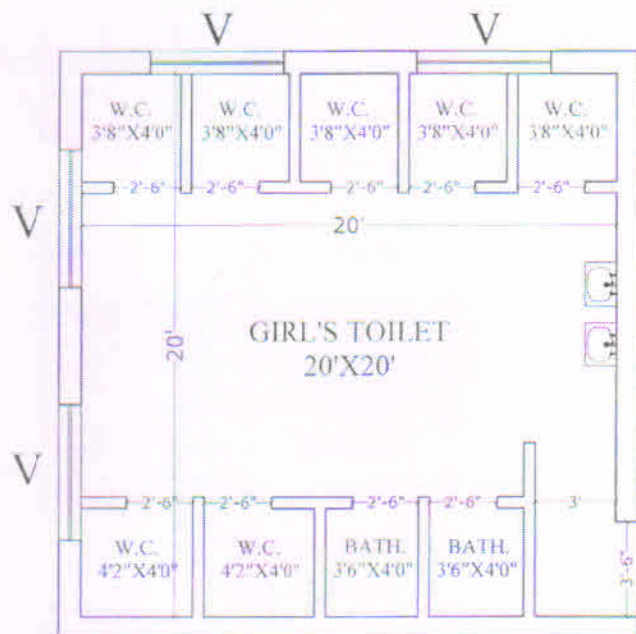


PROPOSED GIRL'S TOILET
ON FIRST FLOOR (BLOCK 'A')

Serial	SoR	Particulars	Quantity	Rate	Unit	Amount
		TOILET SIZE (20'X20')	400.0		SQFT	
	A	NEW FIXTURES AND PIPELINES				
1	MR	Providing and fixing white vitreous china water closet/squatting pan (Indian type) - Long pattern W.C. pan of size 580 mm	7.0		each	
2	MR	Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever required				
		White Vitreous China Wash basin size 630x450 mm with a pair of 15 mm C.P. brass pillar taps (Brand like jaguar)	2.0		each	
3	MR	Providing and fixing pipeline for soil and sewage for wc and urinals and connecting them to septic tank				
		plumbing work for wc	7.0		EACH	
4	18.3.3	Providing and fixing Polyethylene-Aluminium-Polyethylene (PE-ALPE) Composite Pressure Pipes conforming to IS - 15456, including all special fittings of composite materials 2025 (25 mm OD) pipe (INCLUDING INLET/OUTLET)	90.0		metre	
	B	MISCELLANEOUS				
5	MR	soap holder, towel holder and other miscellaneous accessories		LUMSUM		
6	MR	Shower taps etc		LUMSUM		
	C	DOOR (2'6" X 7')				
7	MR	Providing and fixing 12 mm thick prelaminated UPVC doors with waterproof lamination on one side	9.0		each	
8	N A	Miscellaneous items and other fitting and fixture charge		lumsun		
	D	PAINTING WORK				
9	13.75	Distempering with dry distemper of approved brand and manufacture (one or more coats) and of required shade on old work to give an even shade	86.9		Sq m	

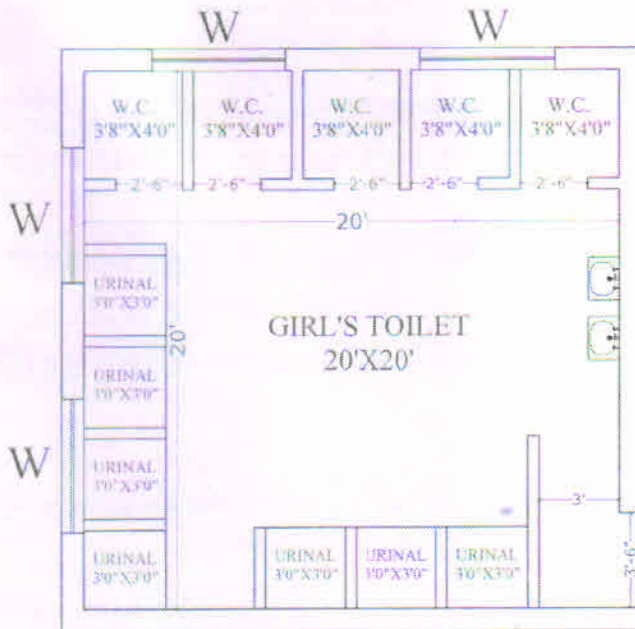


EXISTING GIRL'S TOILET
ON FIRST FLOOR (BLOCK 'A')

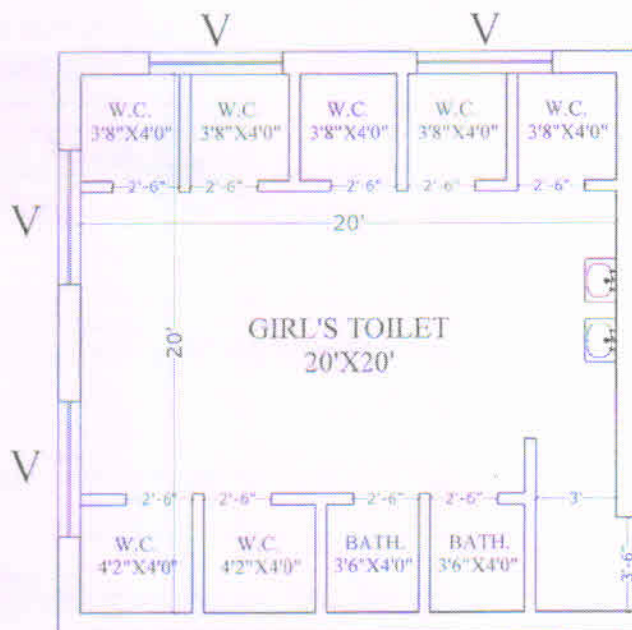


PROPOSED GIRL'S TOILET
ON FIRST FLOOR (BLOCK 'A')

Serial	SoR	Particulars	Quantity	Rate	Unit	Amount
		TOILET SIZE (20'X20')	400.0		SQFT	
	A	DEMOLITION AND DISMANTLING				
1	15.23.2	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead For thickness of tiles above 25 mm and upto 40 mm	137.2		sqm	
2	MR	Taking out 4 W.C pan and 10 urinal basins, urinal basins	14.0		each	
3	MR	Taking out pipelines for about 18 taps	18.0		each	
	B	TOILET				
4	4.1.3	Providing PCC (1:2:4) with graded Stone chips of 20 mm nominal size excluding the cost of centring and shuttering all works in Foundation all complete (3" PCC)	1.8		Cu m	
5	6.1.12/1	Fly ash Brick work with cement mortar (1:4) in Foundation & Plinth	1.9		Cu m	
6	13.11.1	Cement plaster in course sand 12 mm cement plaster of mix 1:3 (1 cement:3 coarse sand)	81.5		SQM	
	C	TILE AREA				
7	11.41.2	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption's less than 0.08 % and conforming to IS - 15622 of approved make in all colours and shades, laid on 20 mm thick cement mortar 1:4 (1 cement: 4 coarse sand) including grouting the joint with white cement and matching pigments etc., complete.	29.2		m	
8	11.36	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS - 15622 (Thickness to be specified by the manufacture) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-charge in skirting, risers of steps and dados over 12 mm thick bed of cement Mortar 1:3(1 cement, 3 coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm including pointing in white cement mixed with pigment of matching shade complete. (7" HIGH)	76.5		Sq m	
			TOTAL			

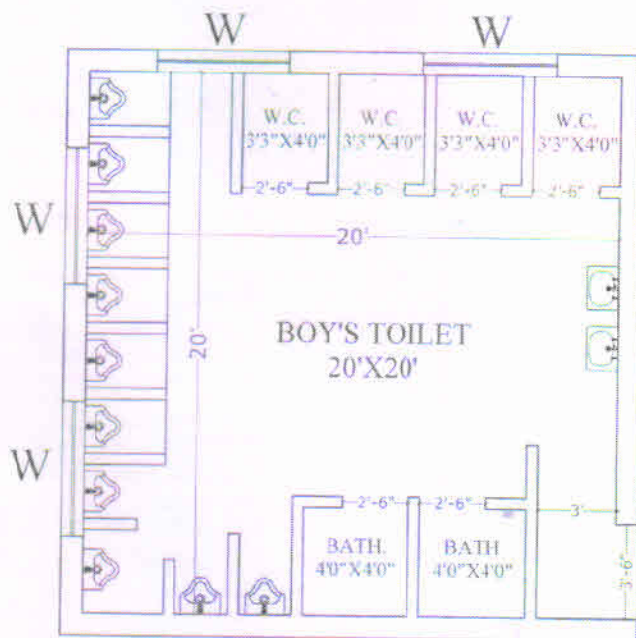


EXISTING BOY'S TOILET
ON SECOND FLOOR (BLOCK 'A')

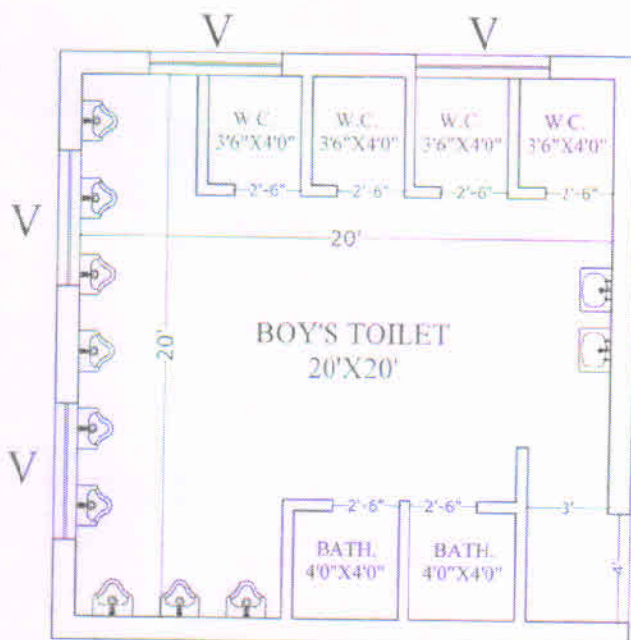


PROPOSED BOY'S TOILET
ON SECOND FLOOR (BLOCK 'A')

Seri	SoR	Particulars	Quantity	Rate	Unit	Amount
		TOILET SIZE (20'X20')	400.0		SQFT	
	A	NEW FIXTURES AND PIPELINES				
1	MR	Providing and fixing white vitreous china water closet squatting pan (Indian type) Long pattern W.C. pan of size 580 mm	3.0		each	
2	17.4.2	Range of two urinal basins with 5 litre white P.V.C. automatic flushing cistern	9.0		EACH	
		Providing and fixing white vitreous china pedestal type water closet (European type) with seat and lid, 10 litre low level white vitreous china flushing cistern & C.P. flush bend with fittings & C.I. brackets, 40 mm flush bend.				
3	17.3.1	overflow arrangement with specials of standard make and mosquito proof coupling of approved municipal design complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required	1.0		EACH	
4	MR	Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require				
		White Vitreous China Wash basin size 630x450 mm with a pair of 15 mm C.P. brass pillar taps	2.0		each	
5	MR	Providing and fixing pipeline for soil and sewage for wc and urinals and connecting them to septic tank				
		plumbing work for urinal	9.0		EACH	
		plumbing work for wc	4.0		EACH	
6	18.3.3	Providing and fixing Polyethylene-Aluminium-Polyethylene (PE-ALPE) Composite Pressure Pipes conforming to IS - 15450, including all special fittings of composite materials 2025 (25 mm OD) pipe (INCLUDING INLET OUTLET)	80.0		metre	
	B	MISCELLANEOUS				
7	MR	soap holder, towel holder and other miscellaneous accessories			LUMSUM	
8	MR	Shower, taps etc			LUMSUM	
	C	DOOR (2'6" X 7')				
9	MR	Providing and fixing 12 mm thick prelaminate UPVC doors with waterproof lamination on one side	7.0		each	
10	N A	Miscellaneous items and other fitting and fixture charge			lumsun	
	D	PAINTING WORK				
11	13.76	Distempering with dry distemper of approved brand and manufacture (one or more coats) and of required shade on old work to give an even shade	88.9		Sq m	

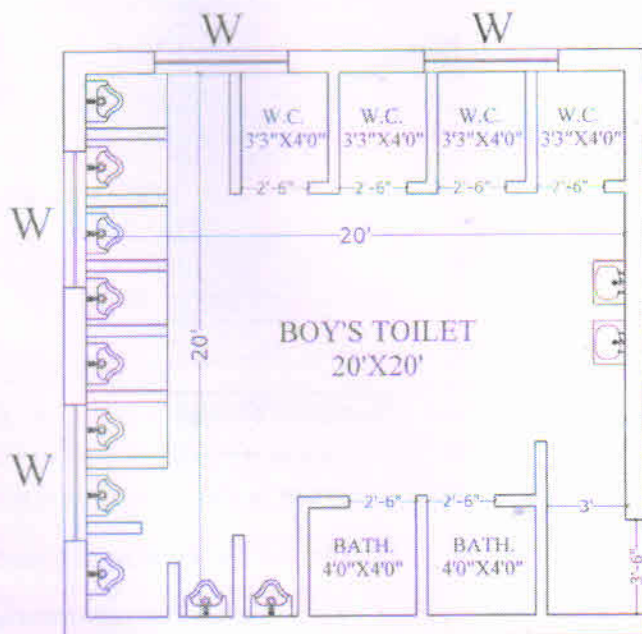

EXISTING BOY'S TOILET
ON SECOND FLOOR (BLOCK 'A')

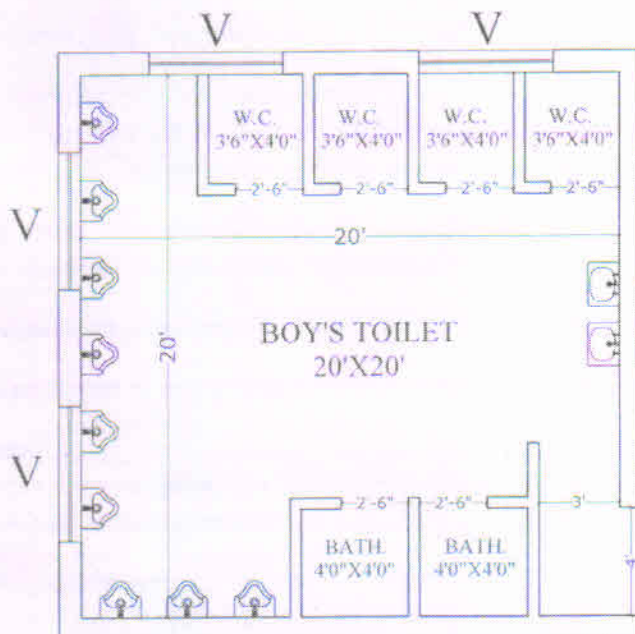

PROPOSED BOY'S TOILET
ON SECOND FLOOR (BLOCK 'A')

